

# Series L8 UL1077 Supplementary Protectors

Supplemental short circuit protection for a variety of applications up to 63 Amps

Sprecher+Schuh Series L8 Supplementary Protectors provide supplemental overcurrent protection for control circuits, solenoids, actuators, appliances, business equipment and a range of other applications where a high performance current limiting device is required. Advanced features and global approvals make them ideal for use in equipment installed throughout the world.

Sprecher+Schuh Supplementary Protectors also incorporate a trip-free mechanism - ensuring that the device operation cannot be defeated by holding the operator in the ON position.

## Easy installation

Sprecher+Schuh Supplementary Protectors mount on a standard 35mm DIN-rail. Wire terminals accept multiple conductors, and UL 508 approved bus bars can be used to quickly distribute power to many Supplementary Protectors simultaneously. In addition, power to the circuit breakers can be fed from the line or load side.

## Global approvals for worldwide acceptance

Series L8 Supplementary Protectors are UL Recognized for use in the United States in accordance with NFPA 79 (NEC, National Electrical Code). The devices comply with UL 1077 and CSA 22.2 No.235, meeting the requirements for supplementary protectors intended for use as overcurrent protection where branch circuit protection is not required, or is provided by another device such as a fuse or molded case circuit breaker. These Supplementary Protectors also comply with IEC 60947-2 for use in commercial and residential applications and are CE marked.



## Broad product range

Series L8 Supplementary Protectors are available in up to 20 different current ratings from 0.5A to 63A, in one, two and three pole configurations. Over 180 base models are available with a full compliment of accessories.

Devices can be used in applications up to 480V AC and 48V DC with interrupting capacities up to 10kA.

## Safety features provide enhanced protection

The terminals of Series L8 Supplementary Protectors provide IP20 protection to guard against accidental contact with live parts.

To aid troubleshooting, a color-coded indicator provides positive visual indication of the device status (green for OFF, red for ON) and isolation function.



See online white paper

**Methods**  
of Applying  
**Circuit**  
Protection

## Three trip characteristics

All Sprecher+Schuh L8 Supplementary Protectors are available with three different tripping characteristics, Type "B", "C", and "D". The tripping characteristic defines the device's speed of response (trip-time) to various levels of overcurrent. Figure 1 shows trip-time versus overcurrent for Type B, C, and D devices. The time-current characteristics enable the device to be optimally matched to the application. For example, PLC outputs that can only tolerate minimal overcurrents are best protected by Supplementary Protectors with Type B trip characteristics.

Sprecher+Schuh L8 Supplementary Protectors are also current limiting - interrupting fault currents within one half cycle. Current limiting devices protect circuit components from damage by reducing the peak let-through current which causes damaging magnetic forces

and let-through energy which generates heat.

### Type "B" Characteristic

Developed primarily to protect conductors and low level signal devices such as PLCs. Instantaneous trip is three to five times the rated current of the Supplementary Protector ( $3\text{--}5 \times I_n$ ). The fast trip time of these devices minimizes damage to control circuit conductors from low-level faults.




### Type "C" Characteristic

Developed primarily for applications with moderate inrush currents such as lighting, control circuits and coils, computers and appliances. Instantaneous trip is five to ten times the rated current of the Supplementary Protector ( $5\text{--}10 \times I_n$ ). The higher instantaneous trip level prevents nuisance tripping, and components being protected can typically withstand higher fault currents without being damaged.

### Type "D" Characteristic

Developed primarily for applications with high inrush currents, i.e., transformers, power supplies and heaters. Instantaneous trip is ten to twenty times the rated current of the Supplementary Protector ( $10\text{--}20 \times I_n$ ). The high instantaneous trip level prevents nuisance tripping, and components being protected can typically withstand higher fault currents without being damaged.

## Compare these advanced features

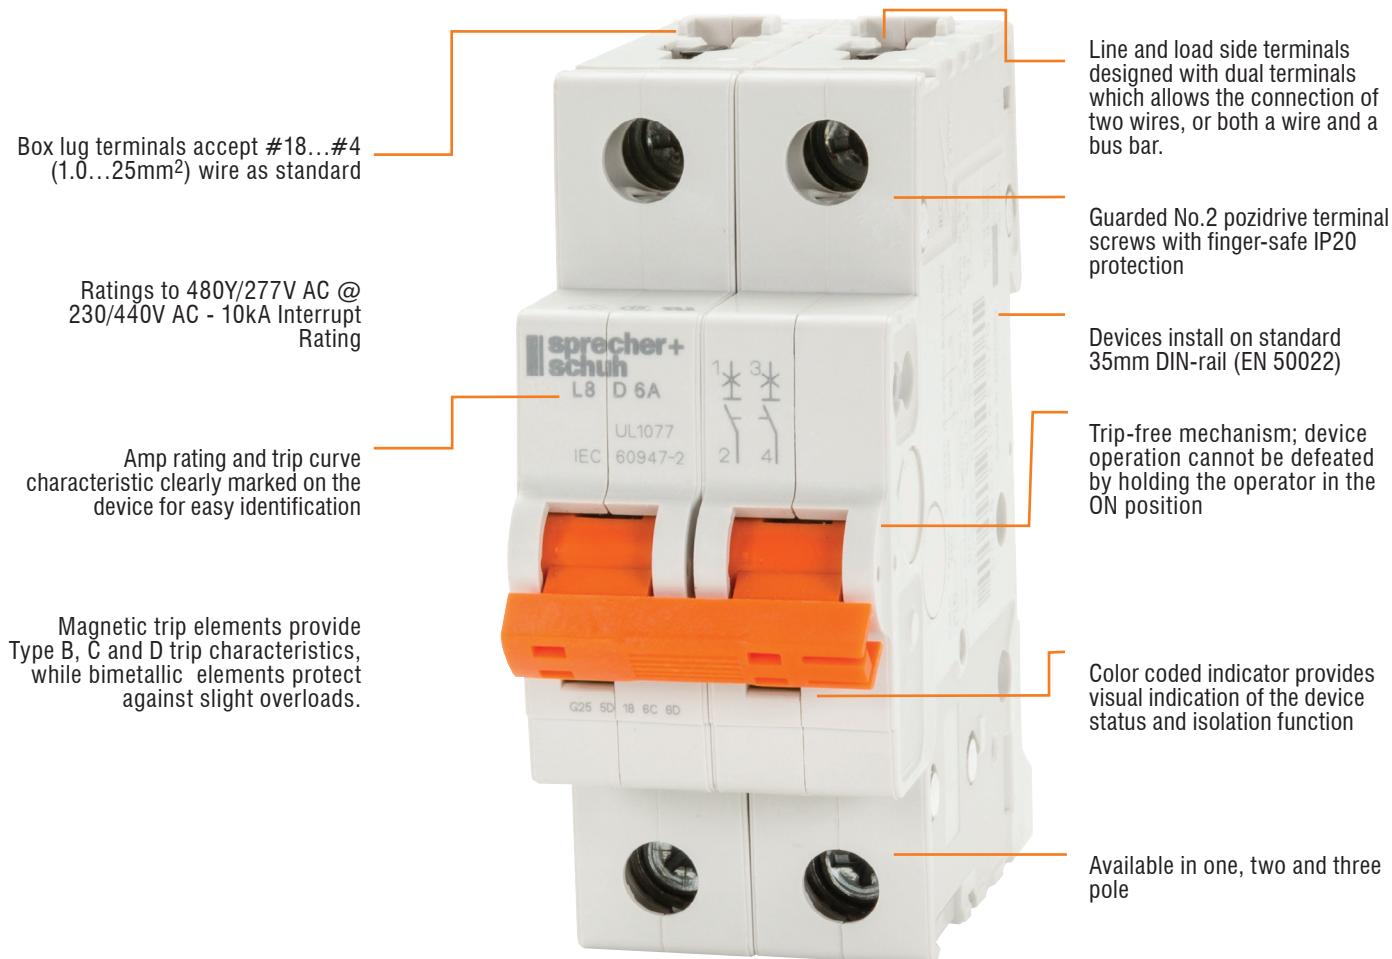

M

L8 Supplementary Protectors

**Trip Characteristic B (3~5 x I<sub>N</sub>) – Resistive or slightly inductive loads ③**

Rated Current (A)	1 Pole ①		2 Pole ②		3 Pole ②	
	Catalog Number	Std. Pkg.	Catalog Number	Std. Pkg.	Catalog Number	Std. Pkg.
0.5	L8-0.5/1/B	2	L8-0.5/2/B	1	L8-0.5/3/B	1
1	L8-1/1/B	2	L8-1/2/B	1	L8-1/3/B	1
2	L8-2/1/B	2	L8-2/2/B	1	L8-2/3/B	1
3	L8-3/1/B	2	L8-3/2/B	1	L8-3/3/B	1
4	L8-4/1/B	2	L8-4/2/B	1	L8-4/3/B	1
5	L8-5/1/B	2	L8-5/2/B	1	L8-5/3/B	1
6	L8-6/1/B	2	L8-6/2/B	1	L8-6/3/B	1
7	L8-7/1/B	2	L8-7/2/B	1	L8-7/3/B	1
8	L8-8/1/B	2	L8-8/2/B	1	L8-8/3/B	1
10	L8-10/1/B	2	L8-10/2/B	1	L8-10/3/B	1
13	L8-13/1/B	2	L8-13/2/B	1	L8-13/3/B	1
15	L8-15/1/B	2	L8-15/2/B	1	L8-15/3/B	1
16	L8-16/1/B	2	L8-16/2/B	1	L8-16/3/B	1
20	L8-20/1/B	2	L8-20/2/B	1	L8-20/3/B	1
25	L8-25/1/B	2	L8-25/2/B	1	L8-25/3/B	1
30	L8-30/1/B	2	L8-30/2/B	1	L8-30/3/B	1
32	L8-32/1/B	2	L8-32/2/B	1	L8-32/3/B	1
40	L8-40/1/B	2	L8-40/2/B	1	L8-40/3/B	1
50	L8-50/1/B	2	L8-50/2/B	1	L8-50/3/B	1
63	L8-63/1/B	2	L8-63/2/B	1	L8-63/3/B	1

**M**
**L8 Supplementary Protector Features:**

- UL-1077 Approved, CSA 22.2 No. 235 and IEC/EN 60947-2
- Thermal Magnetic Overcurrent Protection
- Trip characteristics based on 40°C ambient for UL/CSA
- Up to 10kA interruption ratings
- Finger safe design
- DIN-rail mounting

① 1-Pole ratings: UL/CSA 277VAC 48VDC, IEC 240/440VAC  
 ② Multi-pole ratings: UL/CSA 480Y/277VAC 96VDC, IEC 440VAC  
 ③ See UL Short Circuit ratings U1/U2 in the technical data sections.

**Trip Characteristic C ( $5 \sim 10 \times I_N$ ) – Inductive loads ③**

Rated Current (A)	1 Pole ①		2 Pole ②		3 Pole ②	
	Catalog Number	Std. Pkg.	Catalog Number	Std. Pkg.	Catalog Number	Std. Pkg.
0.5	L8-0.5/1/C	2	L8-0.5/2/C	1	L8-0.5/3/C	1
1	L8-1/1/C	2	L8-1/2/C	1	L8-1/3/C	1
2	L8-2/1/C	2	L8-2/2/C	1	L8-2/3/C	1
3	L8-3/1/C	2	L8-3/2/C	1	L8-3/3/C	1
4	L8-4/1/C	2	L8-4/2/C	1	L8-4/3/C	1
5	L8-5/1/C	2	L8-5/2/C	1	L8-5/3/C	1
6	L8-6/1/C	2	L8-6/2/C	1	L8-6/3/C	1
7	L8-7/1/C	2	L8-7/2/C	1	L8-7/3/C	1
8	L8-8/1/C	2	L8-8/2/C	1	L8-8/3/C	1
10	L8-10/1/C	2	L8-10/2/C	1	L8-10/3/C	1
13	L8-13/1/C	2	L8-13/2/C	1	L8-13/3/C	1
15	L8-15/1/C	2	L8-15/2/C	1	L8-15/3/C	1
16	L8-16/1/C	2	L8-16/2/C	1	L8-16/3/C	1
20	L8-20/1/C	2	L8-20/2/C	1	L8-20/3/C	1
25	L8-25/1/C	2	L8-25/2/C	1	L8-25/3/C	1
30	L8-30/1/C	2	L8-30/2/C	1	L8-30/3/C	1
32	L8-32/1/C	2	L8-32/2/C	1	L8-32/3/C	1
40	L8-40/1/C	2	L8-40/2/C	1	L8-40/3/C	1
50	L8-50/1/C	2	L8-50/2/C	1	L8-50/3/C	1
63	L8-63/1/C	2	L8-63/2/C	1	L8-63/3/C	1

**L8 Supplementary Protector Features:**

- UL-1077 Approved, CSA 22.2 No. 235 and IEC/EN 60947-2
- Thermal Magnetic Overcurrent Protection
- Trip characteristics based on 40°C ambient for UL/CSA
- Up to 10kA interruption ratings
- Finger safe design
- DIN-rail mounting

① 1-Pole ratings: UL/CSA 277VAC 48VDC, IEC 240/440VAC  
 ② Multi-pole ratings: UL/CSA 480Y/277VAC 96VDC, IEC 440VAC  
 ③ See UL Short Circuit ratings U1/U2 in the technical data sections.

**Trip Characteristic D ( $10 \sim 20 \times I_N$ ) – Highly inductive loads ③**

Rated Current (A)	1 Pole ①		2 Pole ②		3 Pole ②	
	Catalog Number	Std. Pkg.	Catalog Number	Std. Pkg.	Catalog Number	Std. Pkg.
0.5	L8-0.5/1/D	2	L8-0.5/2/D	1	L8-0.5/3/D	1
1	L8-1/1/D	2	L8-1/2/D	1	L8-1/3/D	1
2	L8-2/1/D	2	L8-2/2/D	1	L8-2/3/D	1
3	L8-3/1/D	2	L8-3/2/D	1	L8-3/3/D	1
4	L8-4/1/D	2	L8-4/2/D	1	L8-4/3/D	1
5	L8-5/1/D	2	L8-5/2/D	1	L8-5/3/D	1
6	L8-6/1/D	2	L8-6/2/D	1	L8-6/3/D	1
7	L8-7/1/D	2	L8-7/2/D	1	L8-7/3/D	1
8	L8-8/1/D	2	L8-8/2/D	1	L8-8/3/D	1
10	L8-10/1/D	2	L8-10/2/D	1	L8-10/3/D	1
13	L8-13/1/D	2	L8-13/2/D	1	L8-13/3/D	1
15	L8-15/1/D	2	L8-15/2/D	1	L8-15/3/D	1
16	L8-16/1/D	2	L8-16/2/D	1	L8-16/3/D	1
20	L8-20/1/D	2	L8-20/2/D	1	L8-20/3/D	1
25	L8-25/1/D	2	L8-25/2/D	1	L8-25/3/D	1
30	L8-30/1/D	2	L8-30/2/D	1	L8-30/3/D	1
32	L8-32/1/D	2	L8-32/2/D	1	L8-32/3/D	1
40	L8-40/1/D	2	L8-40/2/D	1	L8-40/3/D	1
50	L8-50/1/D	2	L8-50/2/D	1	L8-50/3/D	1
63	L8-63/1/D	2	L8-63/2/D	1	L8-63/3/D	1

**M**
**L8 Supplementary Protector Features:**


- UL-1077 Approved, CSA 22.2 No. 235 and IEC/EN 60947-2
- Thermal Magnetic Overcurrent Protection
- Trip characteristics based on 40°C ambient for UL/CSA
- Up to 10kA interruption ratings
- Finger safe design
- DIN-rail mounting

① 1-Pole ratings: UL/CSA 277VAC 48VDC, IEC 240/440VAC  
 ② Multi-pole ratings: UL/CSA 480Y/277VAC 96VDC, IEC 440VAC  
 ③ See UL Short Circuit ratings U1/U2 in the technical data sections.


## Accessories

Module	Description	For use with...	UL/CSA Max. Current/Voltage	IEC Ratings Current/Voltage	Connection Diagrams	Catalog Number
	<b>Auxiliary/Signal Contact</b> • Mounts on right side of L8 (series B only) ①	All L8 Series B & Shunt Trips	1A @ 480 VAC 2A @ 277 VAC 1.5A @ 125 VDC 2A @ 60 VDC 4A @ 24 VDC	2A @ 230 V (AC-14) 1A @ 400 V (AC-14) 1.5A @ 110 V (DC-12) 1A @ 220 V (DC-12) 4A @ 24 V (DC-13) 2A @ 60 V (DC-13)	1 NO/NC (1 C.O.)  98  96  95	L8-ASCR3
	<b>Shunt Trip –</b> • Remotely trips the device • Installs on right side of L8 (Series B only) ②	All L8 Series B	110...415V AC 110...250V DC  12...60V AC/DC	110...415V AC 110...250V DC  12...60V AC/DC	C1 — C2	L8-AST1  L8-AST2

L8-ASCR3 Assembly

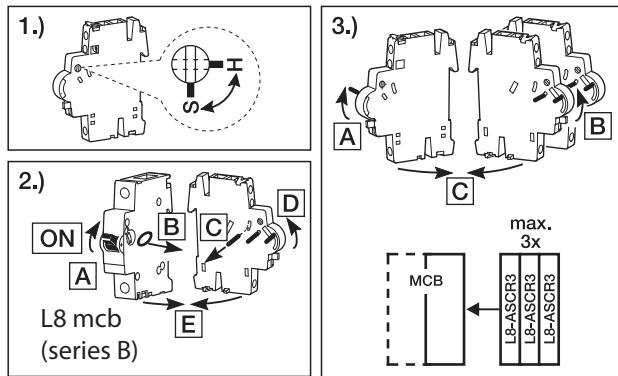

L8-AST1/2 Assembly

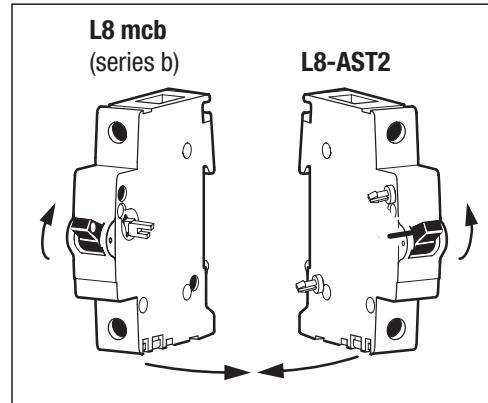

① A maximum of 3 L8-ASCR3 auxiliary contacts may be installed with or without shunt trip per L8 Series B.

② A maximum of 3 ASCR3 plus one (1) L8-AST1/2 shunt trip allowed per L8. The shunt must be mounted closest to the L8, then the signal contacts.

**Accessories**

Accessory	Description	Devices per Meter	For use with...	Catalog Number
	Bus Bar, Pin Style 1-Phase ②③ Qty 1 bar at 1 meter	57	L8 1-pole, 80A max	<b>L8-A1B8</b>
			L8 1-pole, 100A max	<b>L8-A1B1</b>
	Bus Bar, Pin Style 2-Phase ②③ Qty 1 bar at 1 meter	36	L8 1-pole w/ Aux, 80A max	<b>L8-A1B8H</b>
			L8 1-pole w/ Aux, 100A max	<b>L8-A1B1H</b>
	Bus Bar, Pin Style 3-Phase ②③ Qty 1 bar at 1 meter	29	L8 2-pole, 80A max	<b>L8-A2B8</b>
			L8 2-pole, 100A max	<b>L8-A2B1</b>
	Bus Bar, Pin Style 3-Phase ②③ Qty 1 bar at 1 meter	22	L8 2-pole w/ Aux, 80A max	<b>L8-A2B8H</b>
			L8 2-pole w/ Aux, 100A max	<b>L8-A2B1H</b>
	Bus Bar, Pin Style 3-Phase ②③ Qty 1 bar at 1 meter	19	L8 3-pole, 80A max	<b>L8-A3B8</b>
			L8 3-pole, 100A max	<b>L8-A3B1</b>
	Bus Bar, Pin Style 3-Phase ②③ Qty 1 bar at 1 meter	16	L8 3-pole w/ Aux, 80A max	<b>L8-A3B8H</b>
			L8 3-pole w/ Aux, 100A max	<b>L8-A3B1H</b>
	End Caps, sold only in pkgs of 10 ①		L8 1-Phase Bus Bar L8 2-/3-Phase Bus Bar	<b>L8-A1E</b> <b>L8-AME</b>
	Protective Shroud, sold only in pkgs of 10 ①		All L8 bus bars	<b>L8-AAP</b>
	Terminal Power Feed • Sold only in pkgs of 10 ①		L8 2-/3-Phase Bus Bar Straight Lug 10...1/0 AWG 6...50mm <sup>2</sup>	<b>L8-AAT1S</b>
			L8 1-Phase Bus Bar Offset Lug 10...1/0 AWG low profile 6...50mm <sup>2</sup>	<b>L8-AAT1LP</b>
	Lock Out Toggle Mount – • Fits securely over switch toggle. Prevents unauthorized activation of L8 or L9 (series B) during maintenance		L8 or L9 1-pole L8 or L9 Multi-pole (Series B Only)	<b>L8-ALOA1</b> <b>L8-ALOA2</b>

① Sold in packages of 10. Minimum order quantity 10. Priced per piece. Example, one package = 10 pcs of L8-A1E.

② Cuttable, copper bus bar provided in 1 m length. UL 508 Listed, E56639, Category NMTR, cULus. CE to IEC 664 10 kA SCCR for use with L8 Supplementary protectors. See page M14 for dimensions.

③ Bus Bars L8- H are designed to accomodate the L8-ASCR3 Auxiliary Contact module, excluding Shunt Trip.

## Technical Information

### Electrical Ratings

<b>Number of Poles</b>	1, 2, or 3
<b>Tripping Characteristics</b>	B, C, or D
<b>Rated Current <math>I_n</math></b>	0.5...63A
<b>Rated Frequency f</b>	50/60 Hz
<b>Rated Insulation voltage</b>	Phase-to-ground
U <sub>i</sub> acc. to IEC/EN 60664-1	250V AC
	Phase-to-phase
	440V AC
<b>Overvoltage Category</b>	III
<b>Pollution Degree</b>	3

### Data acc. to UL/CSA ⑥

<b>Rated voltage</b>	1-pole	AC	277V AC
		DC	48V DC
	2-pole	AC	480Y/277V AC
		DC	96V DC
	3-pole	AC	480Y/277V AC
<b>Rated interrupting capacity</b>		$\leq 32\text{ A}$ : 10 kA (AC);	
per UL 1077		$> 32\text{ A}$ : 5kA (AC); 0.5...63 A: 10 kA (DC)	
Application ①			
<b>Reference temperature</b>		40°C	
<b>Electrical Endurance</b>		6,000 ops (AC), 6,000 ops. (DC)	
		1 cycle (1s - ON, 9s - OFF)	

### Data acc. to IEC/EN 60947-2

<b>Rated operational voltage <math>U_e</math></b>	1-pole	230V AC
	2-, 3-pole	400V AC
	1-pole	253V AC
	2-, 3-pole	440V AC
	1-pole	48V DC
	2-pole	96V DC
<b>Min. operating voltage</b>		12V AC/DC
<b>Rated ultimate short-circuit breaking capacity <math>I_{cu}</math></b>		15 kA
<b>Rated service short-circuit breaking capacity <math>I_{cs}</math></b>		$\leq 40\text{ A}$ : 11.25 kA $> 40\text{ A}$ : 7.5 kA
<b>Rated impulse withstand voltage <math>U_{imp}</math>.</b> (1.2/50 $\mu\text{s}$ )		4 kV (test voltage 6.2kV at sea level, 5kV at 2,000m)
<b>Dielectric test voltage</b>		2 kV (50/60Hz, 1 min.)
<b>Reference temperature</b> for tripping characteristics		30 °C
<b>Electrical endurance</b>		
1 cycle (2s - ON, 13s - OFF, In $\leq 32\text{A}$ )	In < 30A:	20,000 operations (AC)
1 cycle (2s - ON, 28s - OFF, In $> 32\text{A}$ )	In $\geq 30\text{A}$ :	10,000 ops. (AC); 1,000 ops. (DC)

### Mechanical Data

<b>Housing</b>	Insulation group II, RAL 7035
<b>Indicator window</b>	red ON/green OFF
<b>Protection degree per EN 60529</b>	IP20, IP40 in enclosure with cover
<b>Mechanical endurance</b>	20,000 operations
<b>Shock resistance per IEC/EN 60068-2-27</b>	25 g - 2 shocks - 13 ms
<b>Vibration resistance per IEC/EN 60068-2-6</b>	5g - 20 cycles at 5...150...5 Hz with load 0.8 In

### Environmental

<b>Environmental conditions</b> (damp heat) per IEC/EN 60068-2-30	28 cycles with 55°C/90-96% and 25°C/95-100%
<b>Ambient temperature ②</b>	-25...+55°C
<b>Storage temperature</b>	-40...+70°C

### Installation

<b>Terminal</b>	Dual terminal
<b>Cross-section of wire</b> – solid, stranded (front/back terminal slot) ④	35/35 mm <sup>2</sup> 18...4/18...10 AWG
<b>Flexible</b>	25/10 mm <sup>2</sup>
<b>Multi-wire rating per UL, CSA</b>	1 wire, 18...4 AWG 2-4 wires ③, 18...10 AWG
<b>Cross-section of bus bars</b> (top / bottom)	10/10 mm <sup>2</sup>
<b>IEC</b>	2.8 N•m
<b>Tightening torque</b> UL/CSA	AWG 18...16: 13.3 in•lb AWG 14...10: 17.7 in•lb AWG 8...4: 39.8 in•lb
<b>Screwdriver</b>	No. 2 Pozidrive
<b>Mounting</b>	DIN Rail (EN 60715, 35 mm) with fast clip
<b>Mounting position</b>	Any
<b>Supply</b>	Optional

### Approximate Dimensions/Weight

<b>Pole dimensions</b>	H x D X W	88 x 69 x 17.5 mm (3.46" x 2.72" x 0.69")
<b>Pole weight</b>		115 g (4.1 oz)

### Combination with Auxiliary Elements

<b>Auxiliary contact</b>	Yes
<b>Signal contact</b>	Yes
<b>Shunt trip</b>	Yes

① 2-pole/3-pole single pole load: TC2

② IEC DC Ratings Self-declared

③ 35mm<sup>2</sup> self-declared. Not included in IEC/EN approval.

④ Refer to Ambient Temperature Derating tables.

⑤ UL File E65138

⑥ Wires must be of like size and stranding. Up to two wires per terminal slot.

## Power Loss Due to Current

Rated Current [A]	Power Loss Per Pole [W]	Rated Current [A]	Power Loss Per Pole [W]
0.5	1.4	13	2.3
1	1.4	15	2.4
2	1.8	16	2.5
3	1.6	20	2.5
4	1.8	25	3.2
5	1.9	30	3.5
6	2.0	32	3.7
7	1.1	40	4.5
8	1.5	50	4.5
10	2.1	63	5.4

## Zero-stack Derating

The installation of several miniature circuit breaker side by side with rated current on all poles requires a correction factor to the rated current (not required if spacers are used).

Number of Adjacent Devices	Factor
1	1
2,3	0.9
4,5	0.8
≥ 6	0.75

## L8 Supplementary Protection Devices Ambient Temperature Derating

**Note:** Application below 0°C is for non-condensing atmosphere. Care should be taken for applications below 0°C. These devices are not certified to operate correctly in the presence of ice.

### Temperature Derating, UL

Reference temperature = 40 °C

Current Rating [A]	Ambient temperature (°C)										
	-25	-20	-10	0	10	20	30	40	50	55	60
0.5	0.6	0.6	0.6	0.6	0.5	0.5	0.5	0.5	0.5	0.5	0.5
1	1.2	1.2	1.2	1.1	1.1	1.1	1.0	1	1.0	0.9	0.9
2	2.5	2.4	2.4	2.3	2.2	2.1	2.1	2	1.9	1.9	1.8
3	3.7	3.7	3.6	3.4	3.3	3.2	3.1	3	2.9	2.8	2.8
4	5.0	4.9	4.7	4.6	4.4	4.3	4.1	4	3.9	3.8	3.7
5	6.2	6.1	5.9	5.7	5.6	5.4	5.2	5	4.8	4.7	4.6
6	7.4	7.3	7.1	6.9	6.7	6.4	6.2	6	5.8	5.7	5.6
7	8.7	8.6	8.3	8.0	7.8	7.5	7.3	7	6.7	6.6	6.5
8	9.9	9.8	9.5	9.2	8.9	8.6	8.3	8	7.7	7.6	7.4
10	12.4	12.2	11.9	11.5	11.1	10.7	10.4	10	9.6	9.4	9.3
13	16.1	15.9	15.4	14.9	14.4	14.0	13.5	13	12.5	12.3	12.0
15	18.6	18.3	17.8	17.2	16.7	16.1	15.6	15	14.4	14.2	13.9
16	19.8	19.6	19.0	18.4	17.8	17.2	16.6	16	15.4	15.1	14.8
20	24.8	24.4	23.7	23.0	22.2	21.5	20.7	20	19.3	18.9	18.5
25	31.0	30.6	29.6	28.7	27.8	26.9	25.9	25	24.1	23.6	23.1
30	37.2	36.7	35.6	34.4	33.3	32.2	31.1	30	28.9	28.3	27.8
32	39.7	39.1	37.9	36.7	35.6	34.4	33.2	32	30.8	30.2	29.6
40	49.6	48.9	47.4	45.9	44.4	43.0	41.5	40	38.5	37.8	37.0
50	62.0	61.1	59.3	57.4	55.6	53.7	51.9	50	48.2	47.2	46.3
63	78.2	77.0	74.7	72.3	70.0	67.7	65.3	63	60.7	59.5	58.3



### Temperature Derating, IEC

Reference temperature = 30 °C



Current Rating [A]	Ambient temperature (°C)										
	-25	-20	-10	0	10	20	30	40	50	55	60
0.5	0.6	0.6	0.6	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
1	1.2	1.2	1.1	1.1	1.0	1	1.0	1	1.0	0.9	0.9
2	2.3	2.3	2.2	2.2	2.1	2.1	2	2	1.9	1.9	1.8
3	3.5	3.5	3.4	3.3	3.2	3.1	3	2.9	2.8	2.8	2.7
4	4.7	4.6	4.5	4.4	4.2	4.1	4	3.9	3.8	3.7	3.6
5	5.8	5.8	5.6	5.5	5.3	5.2	5	4.9	4.7	4.6	4.5
6	7.0	6.9	6.7	6.5	6.4	6.2	6	5.8	5.6	5.6	5.5
7	8.2	8.1	7.8	7.6	7.4	7.2	7	6.8	6.6	6.5	6.4
8	9.3	9.2	9.0	8.7	8.5	8.2	8	7.8	7.5	7.4	7.3
10	11.7	11.5	11.2	10.9	10.6	10.3	10	9.7	9.4	9.3	9.1
13	15.1	15.0	14.6	14.2	13.8	13.4	13	12.6	12.2	12.0	11.8
15	17.5	17.3	16.8	16.4	15.9	15.5	15	14.6	14.1	13.9	13.6
16	18.6	18.4	17.9	17.4	17.0	16.5	16	15.5	15.0	14.8	14.6
20	23.3	23.0	22.4	21.8	21.2	20.6	20	19.4	18.8	18.5	18.2
25	29.1	28.8	28.0	27.3	26.5	25.8	25	24.3	23.5	23.1	22.7
30	35.0	34.5	33.6	32.7	31.8	30.9	30	29.1	28.2	27.8	27.3
32	37.3	36.8	35.8	34.9	33.9	33.0	32	31.0	30.1	29.6	29.1
40	46.6	46.0	44.8	43.6	42.4	41.2	40	38.8	37.6	37.0	36.4
50	58.3	57.5	56.0	54.5	53.0	51.5	50	48.5	47.0	46.3	45.5
63	73.4	72.5	70.6	68.7	66.8	64.9	63	61.1	59.2	58.3	57.3

**Note:** In order to use MCB at 60°C you must use cable suitable for this temperature. Any third party certifications are not covering this ambient temperature rating.


## Tripping Characteristics - B and C Curve

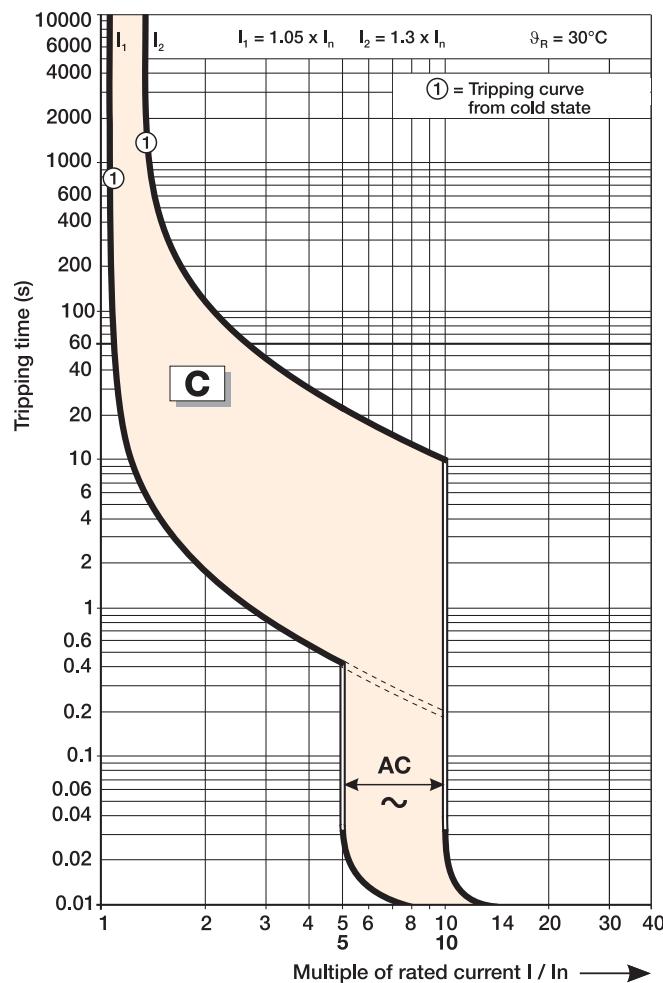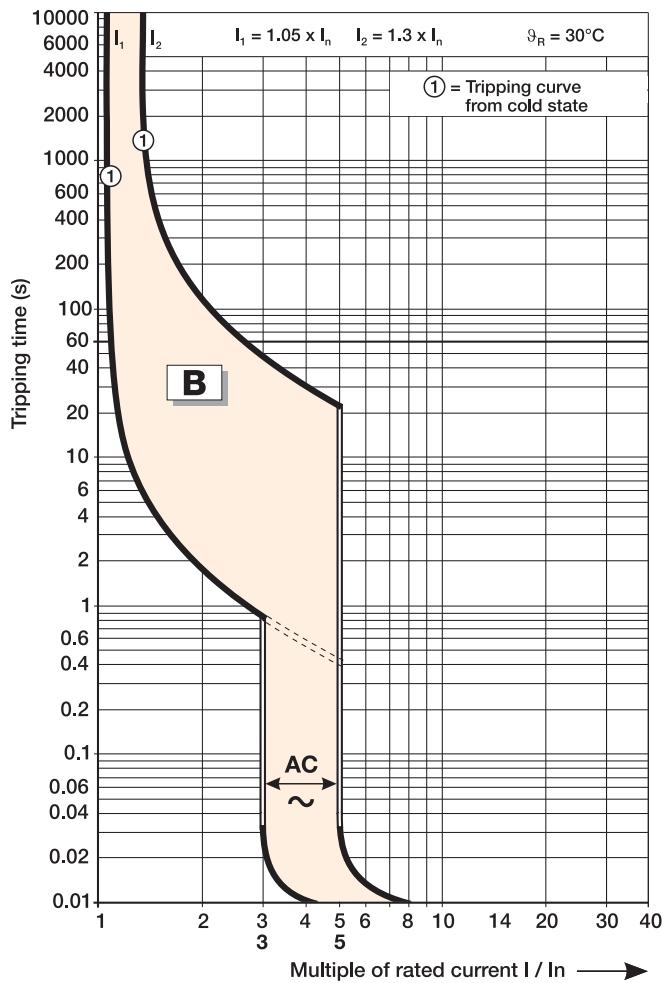



## B and C Curve - 230/400V AC Let-through Energy

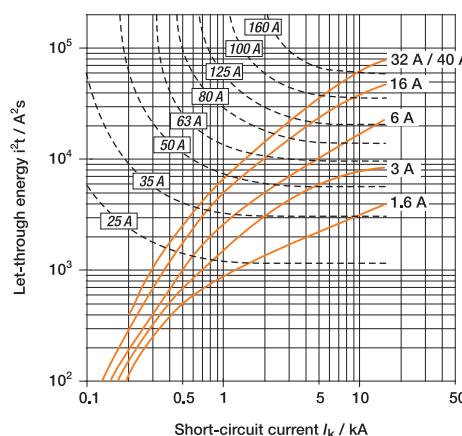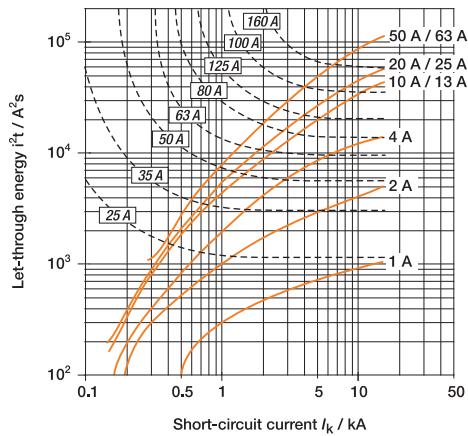

## Tripping Characteristics - D Curve

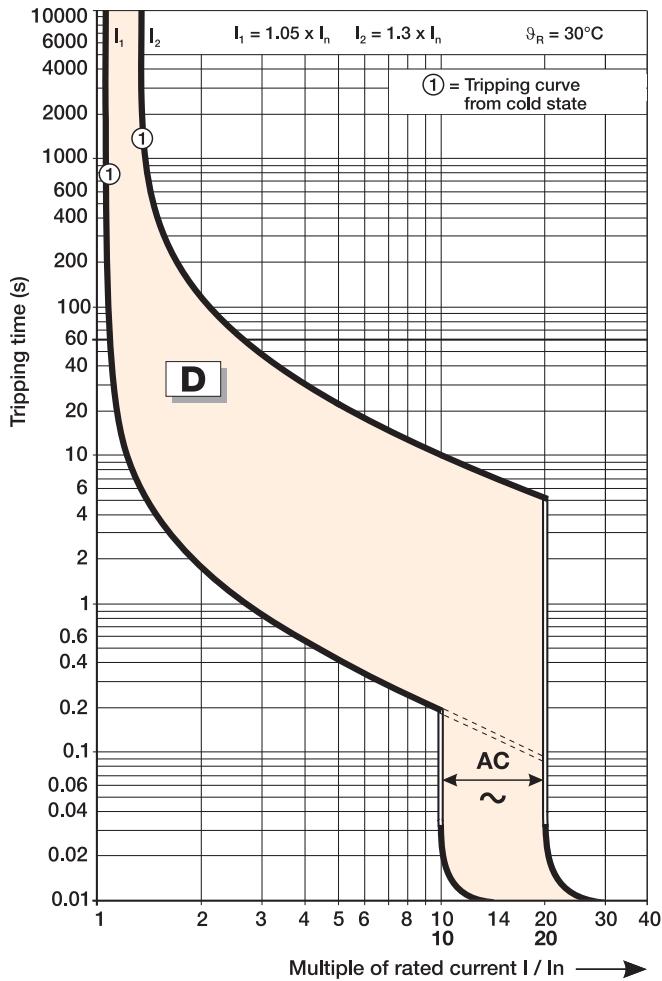


D Curve - 230/400V AC Let-through Energy

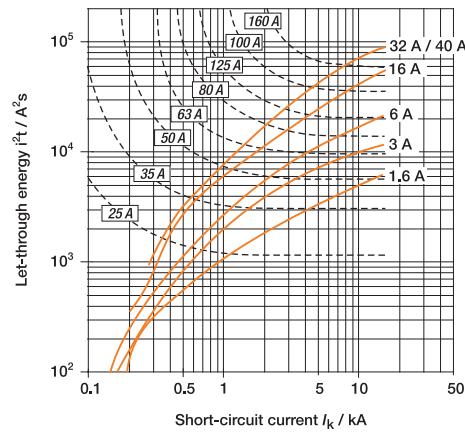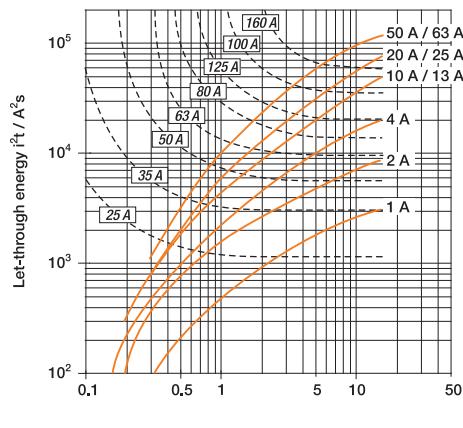

### L8 Supplementary Protectors (Curve B, C & D)


Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

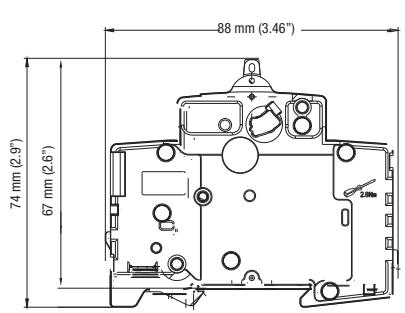


1-Pole




1-Pole

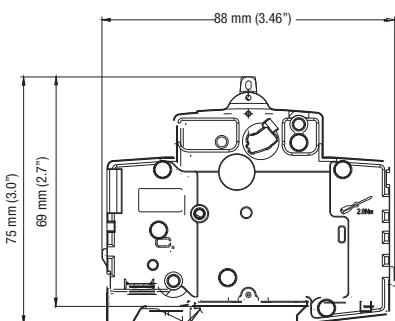

2- & 3-Pole




2-Pole




3-Pole

### Auxiliary Contact/Signal Alarm (L8-ASCR3)



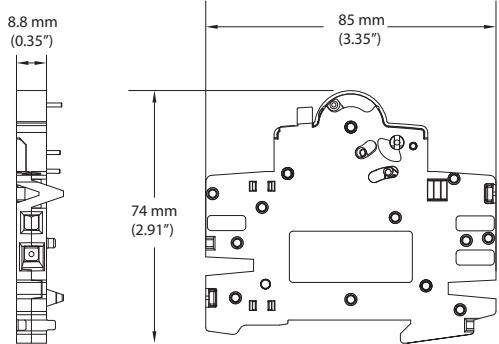


### Shunt Trip Modules (L8-AST1/2)

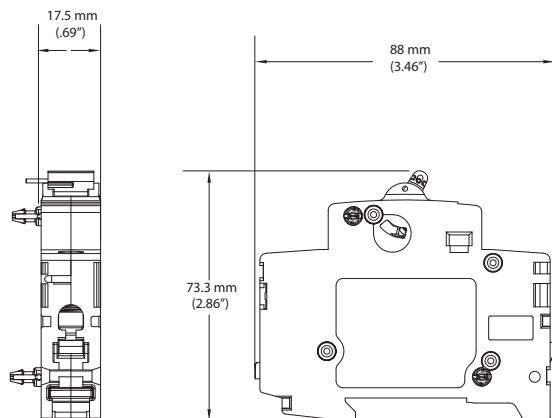




### L8 - 1-Pole Bus Bars (L8-A1B...)

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

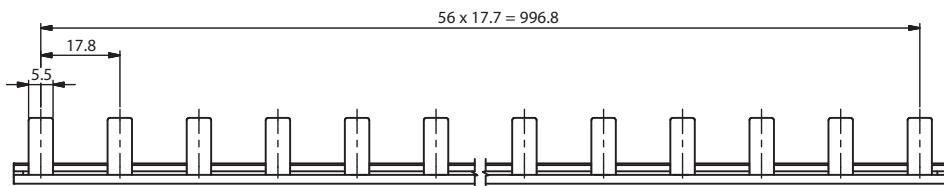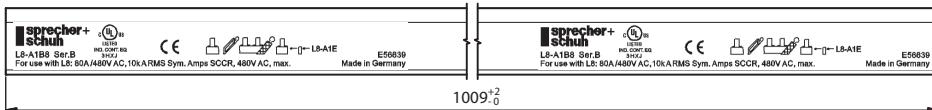

L8-A1B8      L8-A1B1


### L8 - 1-Pole Bus Bars with Auxiliary (L8-A1B...H)

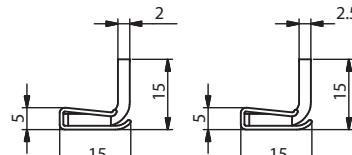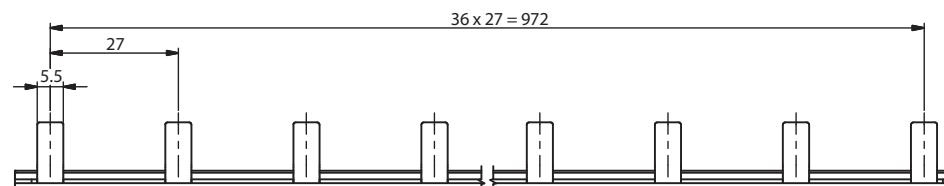


L8-A1B8H      L8-A1B1H

### L8-A2B8 - 2 Pole Bus Bars


Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

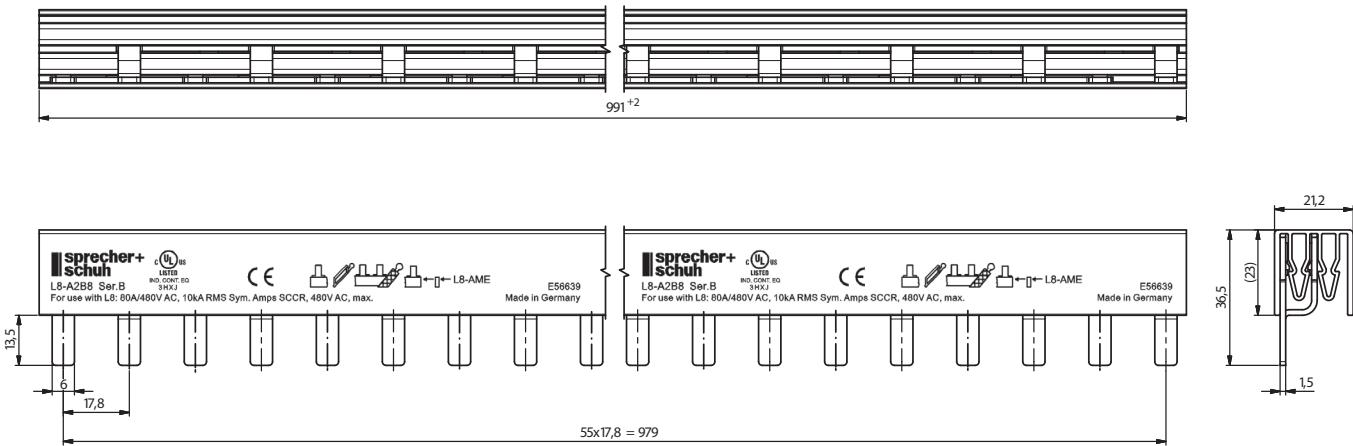

### L8-A2B1 - 2 Pole Bus Bars

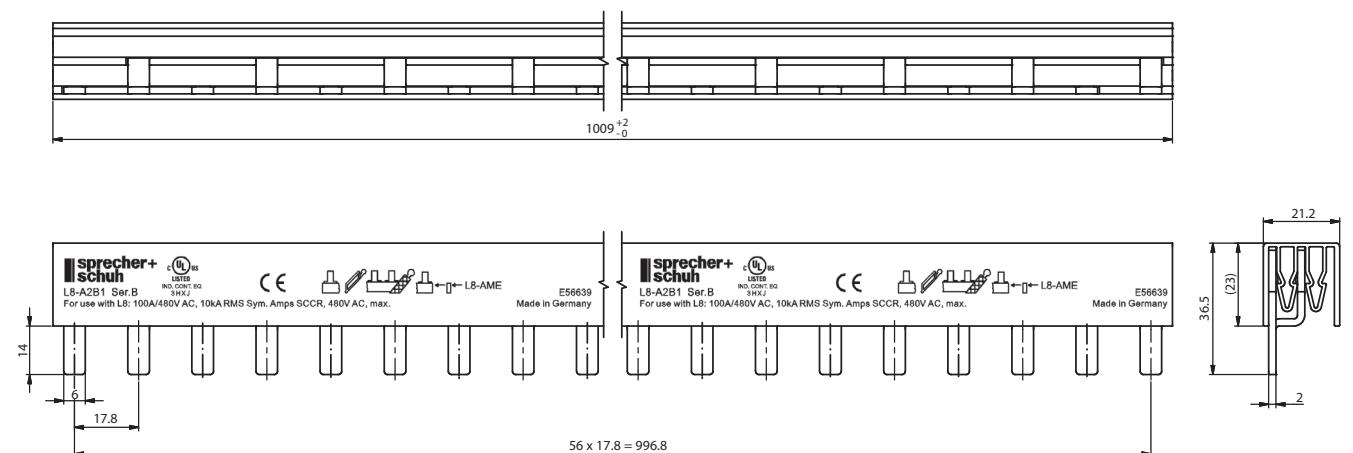


### L8-A2B8H - 2 Pole Bus Bars w/ Auxiliary

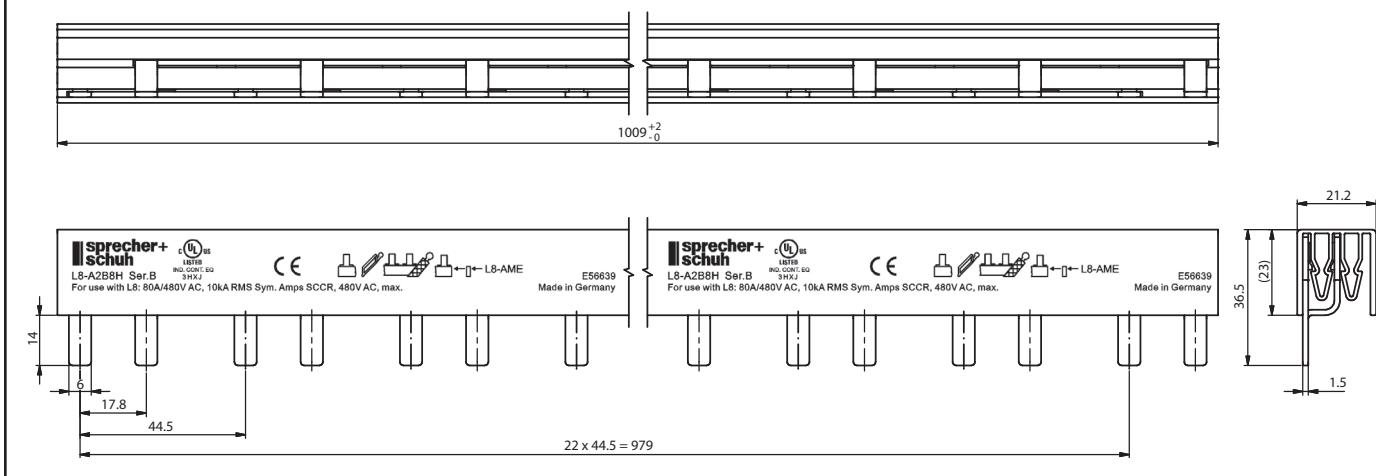


### L8-A2B1H - 2 Pole Bus Bars w/ Auxiliary


Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

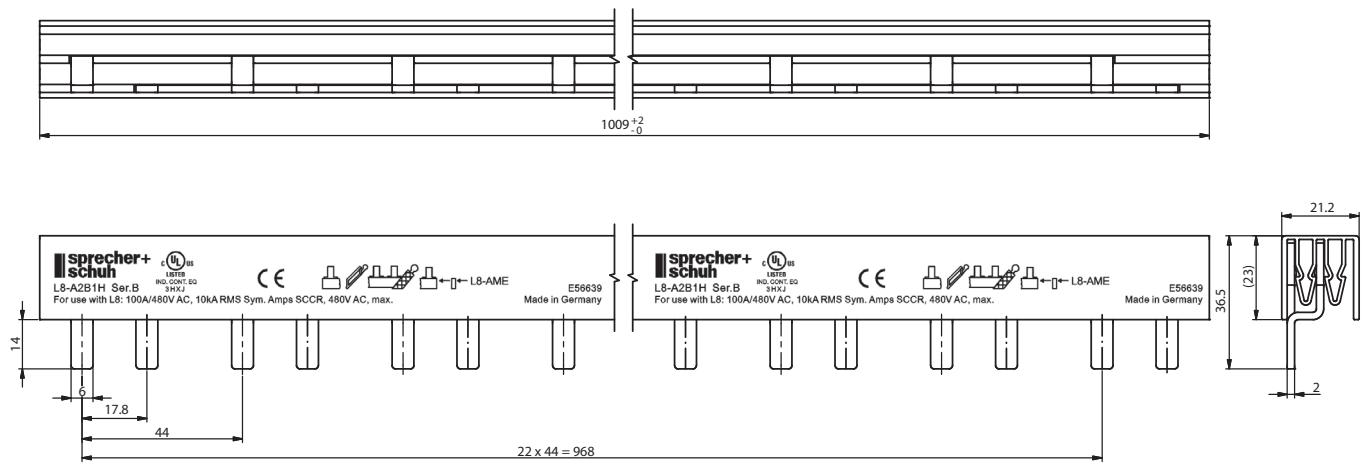

### L8-A3B8 - 3 Pole Bus Bars

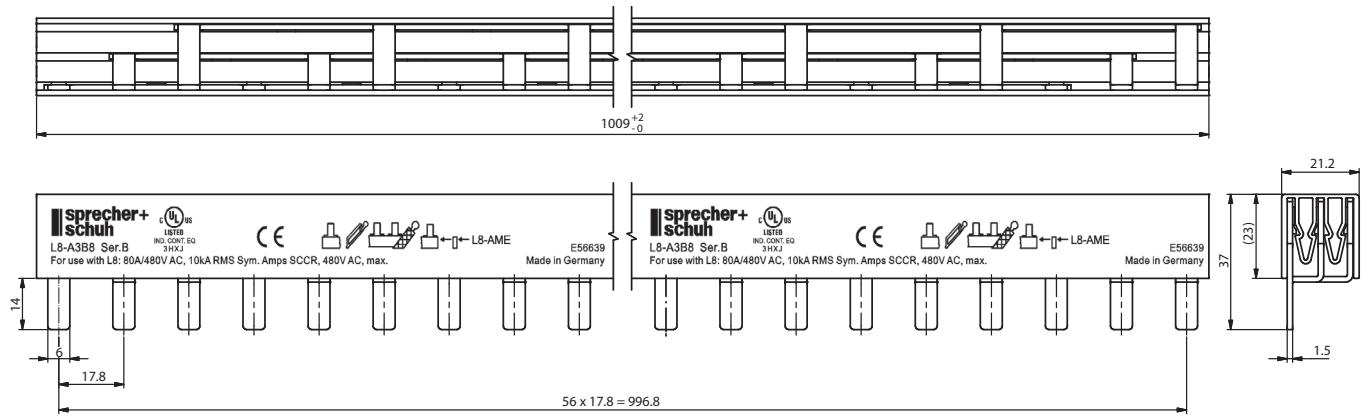


### L8-A3B1 - 3 Pole Bus Bars

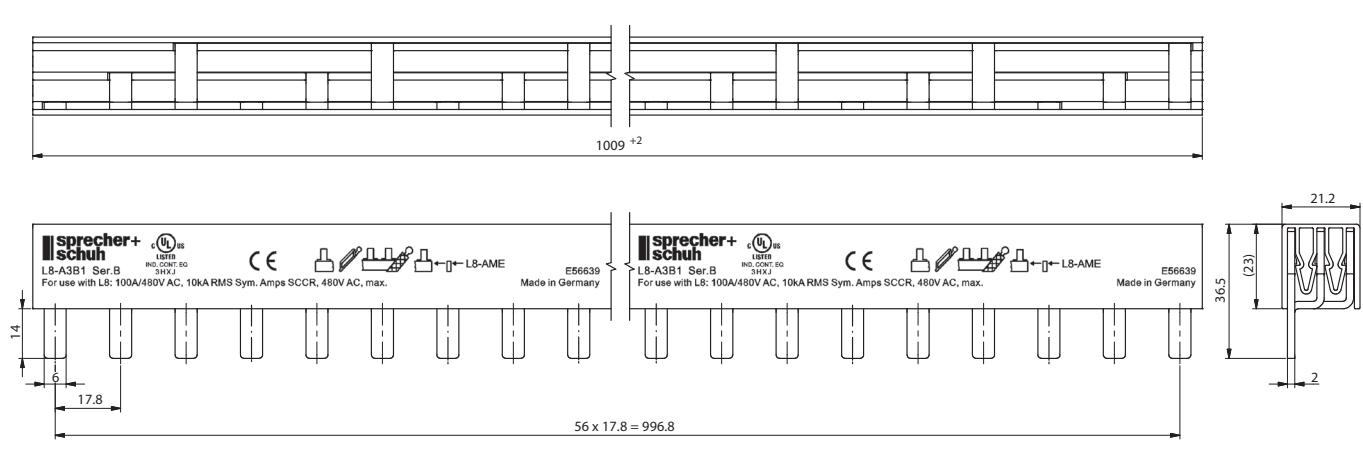


### L8-A3B8H - 3 Pole Bus Bars w/ Auxiliary



Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

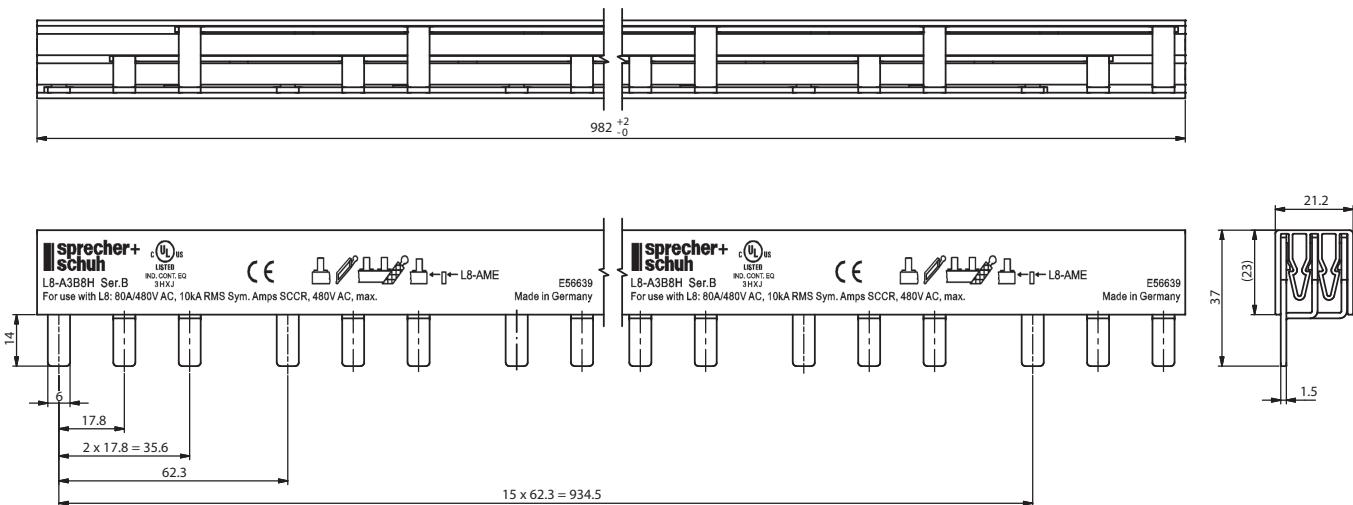


### L8-A3B1H - 3 Pole Bus Bars w/ Auxiliary

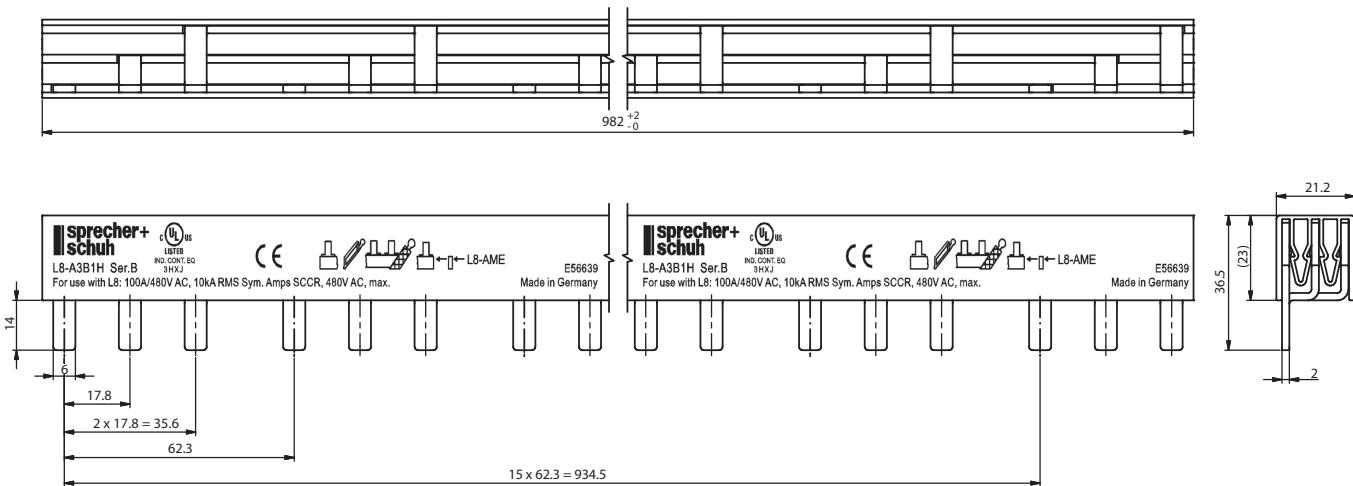


### L8-AAP - Protective Shroud

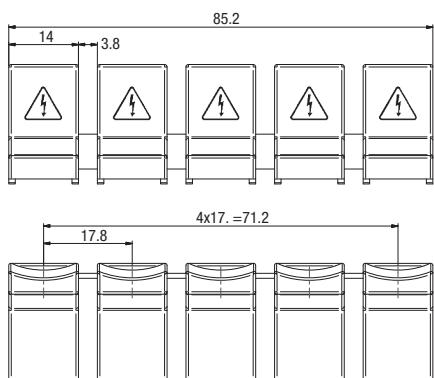


### L8-A1E - End Cap 1-Phase

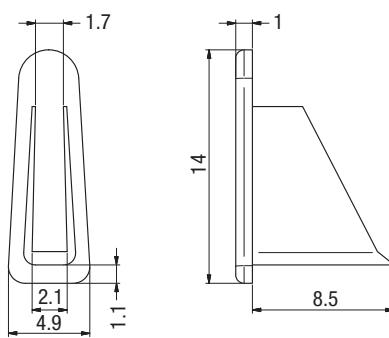


L8-AAT1S - Terminal Lug

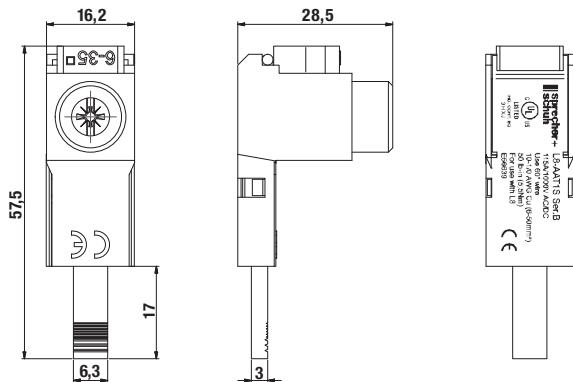


L8-AAT1LP - Terminal Lug

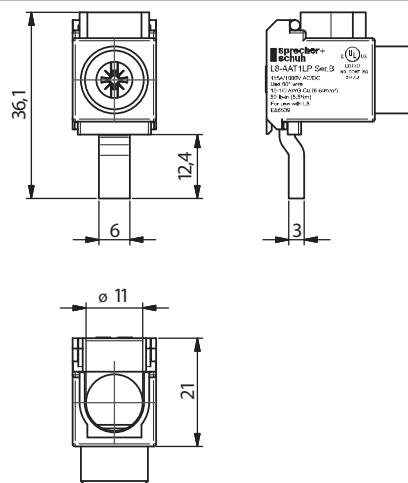


L8-AAT2 - Power Feed

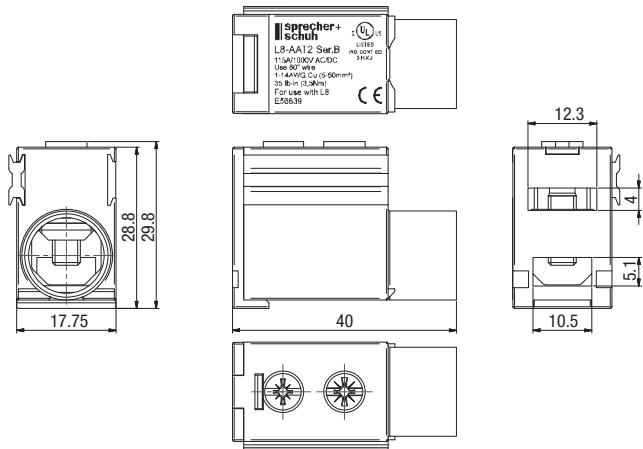


L8-AME - End Cap 2- & 3-Phase

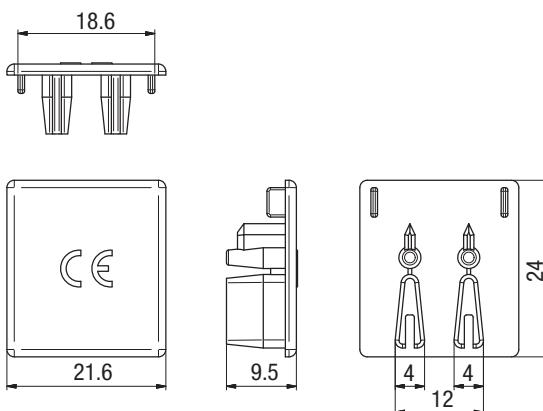


Applying L8 Bus Bars & Accessories

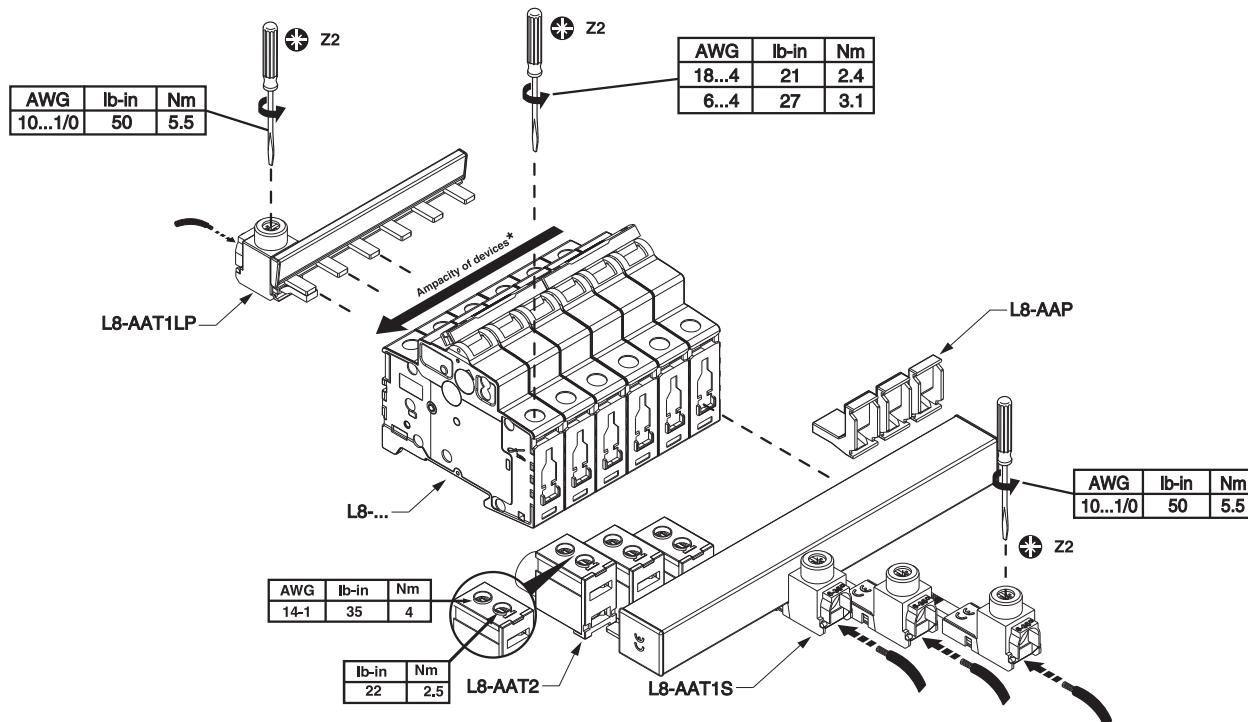


**80AMP**

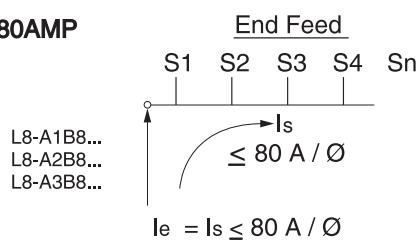

Other Feed

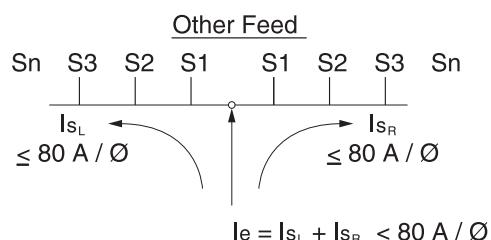

**100AMP**

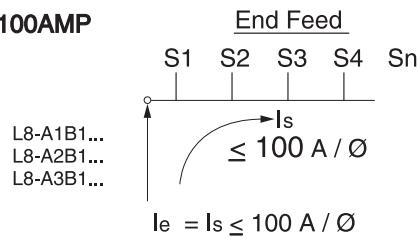

Other Feed

